



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04Q 7/22</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 99/57925</b> <b>(43) International Publication Date:</b> 11 November 1999 (11.11.99)
<b>(21) International Application Number:</b> PCT/SE99/00688 <b>(22) International Filing Date:</b> 27 April 1999 (27.04.99) <b>(30) Priority Data:</b> 09/069,969                      30 April 1998 (30.04.98)                      US <b>(71) Applicant:</b> TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). <b>(72) Inventors:</b> RIMHAGEN, Thomas; Glaspärlevägen 12, S-583 37 Linköping (SE). HELMERSSON, Ke, Wang; Spångerumsgatan 33, S-587 25 Linköping (SE). <b>(74) Agent:</b> ERICSSON RADIO SYSTEMS AB; Common Patent Dept., S-164 80 Stockholm (SE).		<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
<b>(54) Title:</b> DYNAMIC ALLOCATION OF PACKET DATA CHANNELS		
<b>(57) Abstract</b>		
<p>In a cellular telecommunications system, a method of dynamically allocating packet data radio channels among users competing in a same cell for the channels involves determining a user ranking for each of plural competing users in the cell, and classifying each of the plural competing users into one of plural ranking classes. A number of the packet data radio channels available for each of the ranking classes is then determined, after which the users within each ranking class are sorted by ranking. The packet data radio channels are allocated to the users by sorted position within ranking classes. The user ranking for each of the plural competing users in the cell is related to a weighted combination of plural measures of performance for the user.</p> <div data-bbox="1218 1155 1461 1995" style="float: right; text-align: center;"> <pre> graph TD     2-1[COUNT DATA RESOURCES] --&gt; 2-2[CALCULATE USER RANKINGS]     2-2 --&gt; 2-3[CALCULATE DATA RESOURCES PER RANKING CLASS PRESENT]     2-3 --&gt; 2-4[SORT USERS BY RANKING]     2-4 --&gt; 2-5[ALLOCATE DATA RESOURCES]           </pre> </div>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

# DYNAMIC ALLOCATION OF PACKET DATA CHANNELS

## BACKGROUND

### 1. FIELD OF THE INVENTION

The present invention pertains to cellular telecommunications, and particularly  
5 to allocation of data resources in a cellular telecommunications system.

### 2. RELATED ART AND OTHER CONSIDERATIONS

In recent years cellular telephones have become increasingly popular. A cellular telephone is just one example of what is referred to in telephone parlance as a "mobile station" or "mobile terminal". Telecommunications services are provided between a  
10 cellular telecommunications network and a mobile station (e.g., cellular telephone) over an air interface, e.g., over radio frequencies. At any moment an active mobile station is in communication over the air interface with one or more base stations. The base stations are, in turn, managed by base station controllers (BSCs). The base station controllers are connected via control nodes to a core telecommunications network.  
15 Examples of control nodes include a mobile switching center (MSC) node for connecting to connection-oriented, circuit switched networks such as PSTN and/or ISDN, and a general packet radio service (GPRS) node for connecting to packet-switched networks such as Internet, for example.

A mobile station can take on various forms other than a cellular  
20 telephone, including a computer (e.g., a laptop computer) with mobile termination capabilities. In some forms, mobile stations are capable of engaging in differing types of services, or multimedia services. In other words, the mobile station can execute several differing types of programs (i.e., "applications") which interact with the user. Examples of these applications include Internet browsers and electronic mail programs.  
25 Several multimedia applications may reside in the same mobile station.

One type of standardized mobile telecommunications scheme, utilized, e.g., in Europe, is the Global System for Mobile communications (GSM). GSM includes standards which specify functions and interfaces for various types of services. A relatively recent data service available within the GSM system is General Packet  
5 Radio Service (GPRS). GPRS differs from existing data services in that GPRS is a packet switched service instead of a circuit switched data service. Whereas (in GSM) a circuit switched data user is connected continuously to the radio network during a data call (e.g., even when not transferring data), a GPRS user is connected to the radio  
10 network only when either (1) the mobile station desires to transmit or (2) the network has something to transmit to the mobile station. In other words, in GPRS the mobile station (e.g., a computer with mobile termination) is not connected to the network constantly while the computer is in use, but only during these two transmission events.

For the purpose of data services in cellular time division multiple access (TDMA) systems, packet data services such as GPRS are used alongside existing  
15 circuit-switched services. Since the existing radio band cannot be expanded, packet data services must be fitted into the same band as circuit-switched services. Thus, a certain amount of capacity has to be taken from circuit switched services for packet data services. Additionally, as circuit-switched services have been predominate, the introduction of packet data services must not degrade the quality of service for the  
20 existing circuit switched services.

The GPRS service is provided to a connection over a GPRS packet data channel (PDCH). GPRS has two types of packet data channels: (1) the MPDCH, or master packet data channel (which carries broadcast information, paging messages, access grant messages, and user information), and (2) the SPDCH, or slave packet data  
25 channel (which carries user information and associated signalling). A time slot in the radio base stations can dynamically be configured, for instance as a TCH/F (speech traffic channel), MPDCH, or SPDCH.

Radio resources are allocated dynamically. For speech traffic, the radio resource is a full-rate speech time slot (TCH/F) and for data traffic the resource is a  
30 block called PDTCH, which is sent on a PDCH. The packet data channel resources are limited, therefore efficient use of these resources is essential when a radio resource is configured as a PDCH.

Methods of dynamically allocating speech and data resources are known. For example, PCT publication WO96/22665 discloses a method of determining the number of time slots allocated to a packet data service and to a circuit switched service by dynamically allocating more time slots to the form of service having the greater demand at any particular time. A nominal basic number of time slots is reserved for packet radio service and another number of time slots is reserved for circuit switched service. If the traffic requires for packet radio service increases, information regarding the increase is obtained through a request flagged by a mobile station or through traffic measurement by the base station. The information is used as criteria in the allocation of more time slots to the requiring such slots.

Once a packet data channel has been configured for data traffic, the packet data channel must be efficiently utilized in view of the limited packet data resources. Therefore, what is needed, and an object of this invention, is an efficient technique for allocating packet data channels among users.

15

### **BRIEF SUMMARY OF THE INVENTION**

In a cellular telecommunications system, a method of dynamically allocating packet data radio channels among users competing in a same cell for the channels involves determining a user ranking for each of plural competing users in the cell, and classifying each of the plural competing users into one of plural ranking classes. A number of the packet data radio channels available for each of the ranking classes is then determined, after which the users within each ranking class are sorted by ranking. The packet data radio channels are allocated to the users by sorted position within ranking classes.

The user ranking for each of the plural competing users in the cell is related to a weighted combination of plural measures of performance for the user. In general, the user ranking for a user is determined in accordance with the combination

$$r_u = a_1 f_1(x_{1u}) + a_2 f_2(x_{2u}) + \dots + a_M f_M(x_{Mu}),$$

in which there are M different measures of performance for each user; the performance measures being represented by a vector (x), and which includes ranking weighting-functions,  $f_m$  and ranking weighting-constants,  $a_m$ .

In one embodiment, the plural measures of performance for the user include at least two of the following: (1) user priority; (2) maximum delay relative to a target maximum delay value; (3) remaining time relative to a transmission time in higher layers; (4) an assigned bit rate relative to a target bit rate value; (5) a number of remaining packets relative to a target number of remaining packets; (6) a number of recent transmission failures; (7) a required output power value relative to a target output power value; (8) a radio link quality value relative to a target radio link value; and (9) normalized packet delay.

The step of allocating the packet data radio channels to the users by sorted position within ranking classes can be performed by various techniques of the present invention. According to a first technique, the channels are awarded to the users in descending ranking order within each ranking class. In accordance with a second technique, a limiting number of packet data radio channels available to a particular ranking class is determined and, to the users in the particular ranking class, the limiting number of packet data radio channels are awarded in descending ranking order within the particular ranking class.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

The foregoing and other objects, features, and advantages of the invention will be apparent from the following more particular description of preferred embodiments as illustrated in the accompanying drawings in which reference characters refer to the same parts throughout the various views. The drawings are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention.

Fig. 1 is a diagrammatic view of a mobile telecommunications network.

Fig. 2 is a flowchart showing basic steps involved in a determination of which competing users in a cell are afforded data packet channels.

Fig. 3 is a graphical view of a plot of a mapping function  $f_1$ .

Fig. 4 is a graphical view of a plot of a mapping function  $f_2$ .

Fig. 5 is a graphical view showing a sharing of data resources for different priority classes according to a mode of the invention.

Fig. 6 is a chart showing a relationship between user ranking values and corresponding ranking classes.

Fig. 7 is a schematic view of an example base station controller (RNC) which operates in accordance with a mode of the present invention.

Fig. 8 is a schematic view of an example base station (BS) which operates in accordance with a mode of the present invention.

## **DETAILED DESCRIPTION OF THE DRAWINGS**

In the following description, for purposes of explanation and not limitation, specific details are set forth such as particular architectures, interfaces, techniques, etc. in order to provide a thorough understanding of the present invention. However, it will be apparent to those skilled in the art that the present invention may be practiced in other embodiments that depart from these specific details. In other instances, detailed descriptions of well known devices, circuits, and methods are omitted so as not to obscure the description of the present invention with unnecessary detail.

### **1.0 NETWORK OVERVIEW**

Fig. 1 shows a telecommunications network 18 in which a mobile station 20 communicates with one or more base stations 22 over air interface (e.g., radio interface) 23. Base stations 22 are connected by terrestrial lines to base station controller 24, also known as a radio network controller (RNC). Base station controller 24 is, in turn, connected through a control node known as the mobile switching center 26 to circuit-switched telephone networks represented by cloud 28. In addition, base station controller (BSC) 24 is connected to Serving GPRS Support Node (SGSN) 25 and through backbone network 27 to a Gateway GRPS support node (GGSN) 30, through which connection is made with packet-switched telephone networks (e.g., the Internet, X.25 external networks) represented by cloud 32.

Gateway GRPS support node (GGSN) 30 provides the interface towards the external IP packet networks and X.25 networks. Gateway GRPS support node (GGSN) 30 translates data formats, signalling protocols and address information in order to permit communication between the different networks. Backbone network 27 is an Internet Protocol (IP) network. Serving GPRS Support Node (SGSN) 25 provides packet routing to an from a SGSN service area, and serves GPRS subscribers which are physically located within the SGSN service area. Serving GPRS Support Node (SGSN) 25 provides functions such as authentication, ciphering, mobility management, charging data, and logical link management toward the mobile station. A GPRS subscriber may be served by any SGSN in the network depending on location. The GPRS traffic is routed from the Serving GPRS Support Node (SGSN) 25 to base station controller (BSC) 24 and via base station (BS) 22 to mobile station 20. The functionality of Serving GPRS Support Node (SGSN) 25 and Gateway GRPS support node (GGSN) 30 may be combined in the same node, or may exist in separate nodes as shown in Fig. 1.

The telecommunications network 18 of Fig. 1 also includes a packet control unit node, shown as packet control unit (PCU) 50. Various functions of the packet control unit (PCU) 50 are described e.g., in United States patent application serial number 09/\_\_\_\_,\_\_\_\_ (attorney docket 2372-15) filed simultaneously herewith and entitled "ALLOCATION OF CHANNELS FOR PACKET DATA SERVICES", which is incorporated herein by reference.

As understood by those skilled in the art, when mobile station 20 is participating in a mobile telephonic connection, signaling information and user information from mobile station 20 are transmitted over air interface 23 on designated radio channels to one or more of the base stations 22. The base stations have radio transceivers which transmit and receive radio signals involved in the connection. For information on the uplink from the mobile station 20 toward the other party involved in the connection, the base stations convert the radio-acquired information to digital signals which are forwarded to base station controller 24. Base station controller 24 orchestrates participation of the plural base stations 22 which may be involved in the connection, since mobile station 20 may be geographically moving and handover may be occurring relative to the base stations 22. On the uplink, base station controller 24 obtains user information from one or more base stations 22 to yield a coherent connection between



mobile station 20 and the other party, whether that party be in PSTN/IDSN 28 or on the Internet 32.

As seen in Fig. 1, base station controller (BSC) 24 has a central processor (CP) or control unit 40. BSC central processor 40 has access to memory 44. As referenced  
5 herein, memory 44 is has stored therein packet data channel allocation instructions.

Further details of an example base station controller (BSC) 24 are shown in Fig. 7 as comprising a switch 240. Switch 240, which is controlled by BSC central processor 40, has a plurality of ports, some of which are connected to diversity handover unit (DHU) 230 and others of which are connected to various interfaces.  
10 Diversity handover unit (DHU) 230 is connected to a timing unit 241. The BSC control unit 40 is connected to each element of BSC 24. BSC 24 is connected to a signaling network via a signaling interface 243. Signaling interface 243 is connected to BSC central processor 40. The interfaces connected to ports of switch 240 include service node interface unit 244; RNC interface unit 246; and base station interface units 248.  
15 The service node interface unit 244 is connected to the appropriate mobile switching center 26 and GRPS control node 30. RNC interface unit 246 is connected by inter-RNC transport link 232 to other (unillustrated) base station controllers. Base station interface units 248 are connected to the base stations (BS) 22 served by the base station controller (BSC) 24.

20

An example base station (BS) 22 is shown in Fig. 8 as comprising a switch 260. Switch 260, which is controlled by base station control unit 262, has a plurality of ports. At least one, and typically several, of the ports of switch 260 are connected to respective transceiver (Tx/Rx) boards 264. Transceiver (Tx/Rx) boards 264 are connected to  
25 antennae which are located in the cell served by the base station (BS) 22. Control unit 262 is also connected to ports of switch 260, as is an terminal board 266. It is through terminal board 266 that base station (BS) 22 communications with its radio network controller base station controller (BSC) 24, with link 225 being connected between an appropriate base station interface unit 248 of base station controller (BSC) 24(see Fig.  
30 7) and terminal board 266.

The particular example embodiments of base station controller (BSC) 24 shown in Fig. 7 and base station (BS) 22 shown in Fig. 8 happen to be ATM-based nodes. In

this regard, both switch 240 of radio base station controller (BSC) 24 and switch 260 of base station (BS) 22 are, in the illustrated example embodiments, ATM switches through which ATM cells are directed. It should be understood that the present invention is not limited to the particular architectures of the example base station controller (BSC) 24 and base station (BS) 22 shown, nor the use of ATM switches, but that other architectures and data transfer techniques can be employed within the scope and spirit of the present invention.

## 2.0 ALLOCATION OF PDCHs TO USERS

It is the allocation of data packet channels (PDCHs) to users, particularly GPRS channels, to which the present invention primarily relates. For each cell, the present invention determines which competing users are to be afforded data packet channels. The determination of which competing users are to be afforded data packet channels is made by base station controller (BSC) 24 for each cell controlled by base station controller (BSC) 24. Since each cell is typically associated with a corresponding base station (BS) 22, the base station controller (BSC) 24 makes the determination of which competing users are to be afforded data packet channels separately with respect to each base station (BS) 22.

The determination of which competing users are to be afforded data packet channels is particularly determined by BSC central processor 40 of base station controller (BSC) 24. Basic steps performed by BSC central processor 40 are illustrated in Fig. 2 and discussed below. The first basic step, step 2-1 (described in more detail, e.g., in section 2.1), involves counting the data resources ( $dres_c$ ) available in cell  $c$  at any given instant. Step 2-2 (described in more detail, e.g., in section 2.2) involves, for each competing user, calculating a user ranking value ( $r_u$ ). Step 2-3 (described in more detail, e.g., in section 2.3) involves calculating the data resources per ranking class present ( $dres_{cp}$ ). Step 2-4 (described in more detail, e.g., in section 2.4) involves sorting the users by ranking to obtain, for the cell, a ranking vector for each class. Step 2-5 (described in more detail, e.g., in section 2.5) involves allocating the data resources in the cell based on the sorting of users by ranking.

Each of steps 2-1 through 2-5 are described in more detail in the ensuing sections. Reference is made to Table 12 for abbreviations and nomenclature employed herein.

## 2.1 COUNT DATA RESOURCES

Step 2-1 involves counting the data resources ( $dres_c$ ) available in cell  $c$  at any given instant. The data resources available at a given instant of time depends on the multi-frame structure of the PDCH, since user information can only be transferred when PDTCH blocks are sent. The data resources available in a cell ( $dres_c$ ) are expressed by Equation 1:

$$dres_c = \sum_{ts=1}^{dts} (block_{ts} = PDTCH) \quad \text{Equation 1}$$

As explained e.g., by Table 12, in Equation 1  $dts$  is the number of time slots allocated for data traffic.

## 2.2 CALCULATE USER RANKING

Step 2-2 of Fig. 2 involves, for each competing user, calculating a user ranking value ( $r_u$ ). For each user, a ranking value between 0 and P is calculated with Equation 2:

$$r_u = a_1 f_1(x_{1u}) + a_2 f_2(x_{2u}) + \dots + a_M f_M(x_{Mu}) \quad \text{Equation 2}$$

In Equation 2 it is assumed that there are  $M$  different measures of performance for each user. The ranking weighting-functions,  $f_m$ , are described below (see Equation 4), as are ranking weighting-constants,  $a_m$  (see Equation 5). The performance measurements are represented by the  $x$  vector of the user as shown in Equation 3:

$$\overline{x_u} = [x_{1u} x_{2u} \dots x_{Mu}] \quad \text{Equation 3}$$

In order to ensure a value range of 0 to P, the  $x$  vector is mapped with the ranking weighting-functions,  $f_m$  (see Equation 4):

$$f_m(x_m) \in [0, P] \quad \text{Equation 4}$$

The mutual importance between different performance measures is defined by the ranking weighting-constants,  $a_m$ . For instance, assume two performance measures, where the first is considered as three times more important than the second one. With reference to Equation 5, for example, this gives  $a_1 = 0.75$  and  $a_2 = 0.25$ .

$$\sum_{m=1}^M a_m = 1 \quad \text{Equation 5}$$

Several performance measures may influence the ranking value, such as those listed below:

- maximum delay relative to a target delay value
- user priority, for instance based on subscription
- remaining time relative retransmission timer in higher layers (IP and LLC)
- assigned bit rate relative a target bit rate value
- remaining packets relative a target value
- number of recent transmission failures
- needed output power relative a target value
- radio link quality relative a target value
- normalized packet delay (seconds/kbytes)

Below is an example where the first performance measure is the user priority ( $p_u$ ) stated in the channel request and the second is the maximum delay currently experienced ( $d_{\max_u}$ ).

$$\overline{x_u} = [p_u \ d_{\max_u}] \quad \text{Equation 6}$$

The user priority can be mapped with the ranking weight-function,  $f_1$  of Equation

7:

$$f_1(p_u) = \begin{cases} 0 & p_u \geq P \\ \frac{P}{P-1} (P - p_u) & 1 < p_u < P \\ P & p_u \leq 1 \end{cases} \quad \text{Equation 7}$$

This way, the highest user priority (1) results in the highest ranking (P). Fig. 3 graphically illustrates a plot of the mapping function  $f_1$ .

Equation 8 is an example of a mapping function for maximum delay:

$$f_2(d_{\max}) = \begin{cases} P & d_{\max} \geq dtgt \\ P \left( \frac{2}{dtgt} \cdot d_{\max} - 1 \right) & \frac{1}{2} \cdot dtgt < d_{\max} < dtgt \\ 0 & d_{\max} \leq \frac{1}{2} \cdot dtgt \end{cases} \quad \text{Eqn. 8}$$

In Equation 8,  $dtgt$  is the delay target value and  $d_{\max}$  is the maximum delay. Equation 8 is illustrated in Fig. 4 where the target value for maximum delay has been chosen to 5 seconds. Fig. 4 graphically illustrates a plot of the mapping function  $f_2$ .

If it were desired for  $p_u$  and  $d_{\max}$  to have equal importance, then  $a_1=0.5$  and  $a_2=0.5$ , in which case from Equation 2 Equation 9 is obtained:

$$r_u = \frac{1}{2} \cdot f_1(p_u) + \frac{1}{2} \cdot f_2(d_{\max}) \quad \text{Equation 9}$$

### 2.3 CALCULATE DATA RESOURCES PER RANKING CLASS PRESENT

Step 2-3 of Fig. 2 involves calculating the data resources per ranking class present ( $dres_{cp}$ ). Each ranking class, represented by at least one user in the cell, is assigned a share of the available resources at a given instant of time. The share of resources is calculated from the ranking of the ranking classes and the number of resources currently available. In the expressions and equations below,  $p$  is an integer

representing a ranking class present and P is an integer representing the highest possible ranking class.

$$p = \text{integer}(r_u) + 1 \quad \text{for all users in the cell} \quad \text{Equation 10}$$

$$r_p = p \quad \text{for all ranking classes in the cell} \quad \text{Equation 11}$$

$$\text{dres}_{cp} = \text{round} \left( \frac{r_p}{\sum_{i=1}^{P_c} r_i} \cdot \text{dres}_c \right) \quad \text{for all ranking classes in the cell} \quad \text{Equation 12}$$

Due to rounding errors, it is necessary to perform the test of Equation 13 after the calculations of all ranking classes in the cell. As an alternative, it is possible to mathematically foresee where the rounding error will occur.

$$\text{while } \sum_p \text{dres}_{cp} > \text{dres}_c \quad \text{Equation 13}$$

then deduct one resource from the class with highest priority.

## 2.4 SORT USERS BY RANKING

Step 2-4 of Fig. 2 involves sorting the users by ranking to obtain, for the cell, a ranking vector for each class. Consider cell c with five users belonging to the same ranking class (ranking class 2, in this example) and where the ranking for each user has been stored in the r vector as shown in Equation 14:

$$\overline{r_{c2}} = [1.8 \ 1.1 \ 1.2 \ 1.9 \ 1.3] \quad \text{Equation 14}$$

The vector of Equation 14 is then sorted and the indices are stored in another vector shown in Equation 15:

$$\overline{\text{ind}_c} = [4 \ 1 \ 5 \ 3 \ 2] \quad \text{Equation 15}$$

From the resulting vector of Equation 15, it can be seen that resources should be allocated to the users in the following order: user<sub>4</sub>, user<sub>1</sub>, user<sub>5</sub>, user<sub>3</sub> and user<sub>2</sub>.

## 2.5 ALLOCATE DATA RESOURCE TOP-DOWN

Step 2-5 of Fig. 2 involves allocating the data resources in the cell based on the sorting of users by ranking. The allocation of the available resources to the requesting users can be accomplished using many different techniques. The main philosophy is to allocate as many resources as possible. The ranking warrants a correct handling of each user request. Set forth separately in sections 2.5.1 through 2.5.3 are three alternative techniques of top-down allocation. Common for all alternative techniques is that the allocation is conducted for one ranking class (present in the cell) at a time, starting with the highest ranking class. The allocation techniques for users belonging to the same ranking class, differs in the alternatives.

### 2.5.1 STRAIGHT-FORWARD TOP-DOWN

According to a first technique of allocating the data resources in the cell based on the sorting of users by ranking, the user requests are processed in descending ranking order. Any unused resources are passed on the next user in turn. The maximum number of available resources must not be exceeded. Consequently, all users may not get the requested number of resources.

Continuing with the example of Section 2.4, it is assumed that the number of resources in the cell is 10. Then the resources are allocated as in Table 1.

---

User	Resources Requested	Allocated Resources	Queued Requests
4	1	1	0
1	4	4	0
5	2	2	0
3	7	3	4
2	3	0	3

TABLE 1 STRAIGHT-FORWARD TOP DOWN APPROACH

---

### 2.5.2 STRAIGHT-FORWARD TOP-DOWN WITH USER LIMITS

According to a second technique of allocating the data resources in the cell based on the sorting of users by ranking, the user requests are processed in descending ranking order exactly as in alternative A, but the maximum number of resources per user is limited. In the example in Table 2, this limit is two resources per user. In this example, only 9 resources are allocated although 10 are available.

---

User	Resources Requested	Allocated Resources	Queued Requests
4	1	1	0
1	4	2	2
5	2	2	0
3	7	2	5
2	3	2	1

TABLE 2 STRAIGHT-FORWARD TOP-DOWN WITH USER LIMITS APPROACH

---

### 10 2.5.3 RELATIVE RANKING

According to a third technique of allocating the data resources in the cell based on the sorting of users by ranking, the relative ranking approach used when calculating resources between ranking classes are also used within each ranking class, see Equation 12 and Equation 13. User ranking values are taken from Equation 14. The result is shown in Table 3.

---

User	Resources Requested	Allocated Resources	Queued Requests
4	1	1	0
1	4	4	0
5	2	2	0
3	7	2	5
2	3	1	2

TABLE 3 RELATIVE RANKING APPROACH



### 3.0 ILLUSTRATIVE EXAMPLE

This section shows an example of the present invention in which a cell which has 3 transceivers (TRX's). Two time slots are used for BCCH and SDCCH, which leaves 22 time slots for speech and data traffic. These time slots are currently configured according to Table 4 below.

Description	Parameter	Value
Speech time slots	sts	12
Data time slots	dts	7
Idle time slots	its	3

TABLE 4 CURRENT TIME SLOT CONFIGURATION IN CELL C

Table 5 shows the current block status of the data resources.

Data Time Slot	PDCH	Current block
1	MPDCH	PBCCH
2	SPDCH	PDTCH
3	SPDCH	PDTCH
4	SPDCH	PDTCH
5	SPDCH	PDTCH
6	SPDCH	PDTCH
7	SPDCH	PDTCH

TABLE 5 BLOCK STATUS OF DATA RESOURCES

Out of the seven PDCH's, six can currently be used to carry user information. There are five users in cell. Their requests for data resources (queued packets) are shown below, together with the tagged user priority and the current maximum delay

value. The user priority submitted in the channel request can have values 1, 2, 3 and 4, where 1 is highest priority.

### 3.1. COUNT DATA RESOURCES

From Table 5, it is seen that six data resources (PDTCH) are currently available.

### 3.2 CALCULATE USER RANKING

Assuming a ranking value based on user priority and maximum delay of equal importance, Equation 9 and Table 6 gives the rankings shown in Table 7.

User	Queued Packets	User Priority	Maximum Delay
u	qp	$p_u$	dmax
1	36	4	200
2	81	4	50
3	228	4	110
4	1024	1	40
5	17	3	180

TABLE 6 INFORMATION ABOUT THE USERS IN CELL

User Ranking	user 1	user 2	user 3	user 4	user 5
$r_u$	1.2	0	0	2	1.55

TABLE 7 USER RANKING VALUES

### 3.3 CALCULATE DATA RESOURCES PER RANKING CLASS PRESENT

The user ranking value is used to determine which ranking class a certain user belongs to, according to Equation 10 (see also Fig. 5). Here, ranking classes 1, 2 and 3

are present, ranking class 4 is not present. For instance, ranking class 3 is treated as three times more important than ranking class 1 as shown in Table 8 below.

User Ranking	user 1	user 2	user 3	user 4	user 5
p	2	1	1	3	2

5

TABLE 8 RANKING CLASSES

Fig. 6 illustrates a relationship between user ranking values and corresponding ranking classes.

10

The next step is to calculate the ranking of the ranking classes according to Equation 11. Then Equations 12 and 13 are used to determine the number of data resources per ranking class. The result is shown in Table 9.

Ranking Class	Ranking Value	Data Resources
P	$r_p$	$dres_c$
3	3	3
2	2	2
1	1	1

15

TABLE 9 NUMBER OF RESOURCES PER RANKING CLASS

### 3.4 SORT USERS BY RANKING

The users are sorted by ranking order in each ranking class as shown in Table 10.

Ranking Class	User	User Ranking
3	4	2
2	5	1.55
2	1	1.2
1	2	0
1	3	0

20

TABLE 10 USERS SORTED BY RANKING

### 3.5 ALLOCATE DATA RESOURCES TOP-DOWN

Assuming allocation as described in the first alternative described in section 2.5,  
 5 the resources are allocated as shown in Table 11.

Ranking Class	User	Queued Packets	Resources Allocated	New Queue
3	4	1024	3	1021
2	5	17	2	15
2	1	36	0	36
1	2	81	1	80
1	3	228	0	228

TABLE 11 DATA RESOURCES ALLOCATED PER ALTERNATIVE A

10 The number of resources allocated to each user can be compared with the user  
 priority of each user request. User 4 has higher user priority and then user 5 and the  
 other three users all have the lowest priority. Here, user 2 got one resource (not user 1  
 or 3). User 2 and 3 have the same ranking value in ranking class 1 and user 2 was  
 chosen randomly.

15

### 4.0 EPILOGUE

The invention thus relates to a method of allocating available data resources to  
 data users in a cell. For each user, a ranking value is calculated from several  
 performance measures. Given the ranking value, each user belongs to a ranking class  
 20 and each ranking class is assigned a share of the total number of the data resources  
 available in the cell. Within each ranking class, the users are ordered in descending  
 ranking order. Finally, the data resources are allocated top-down and any unused  
 resources are passed on to the next user in turn. Some users may not get any resources  
 since the number of resources available must never be exceeded.

25

Fig. 5 graphically illustrates allocation of data channels among three different ranking classes in accordance with one mode of the invention.

The use of ranking classes ensures users with low ranking to at least get a share, perhaps small, of the resources when located in a cell with a few highly ranked users.

The procedure of the present invention is based on local decisions made for each cell in the cellular system and is to be performed at a regular time interval.

TABLE 12

Parameter	Description
its	number of idle time slots
sts	number of time slots allocated for speech traffic
dts	number of time slots allocated for data traffic
dmax	maximum delay
dtgt	delay target-value
r	ranking value
a	ranking weighting constant
f	ranking weighting function
p	ranking class, $p = 1, 2, \dots, P$
x	performance value
dres	number of available data resources
tres	number of available traffic resources
qp	number of packets in queue
qpmin	minimum number of packets in queue
rsts	number of time slots reserved for speech traffic
swt	waiting time when activating a time slot. The time slot can not carry traffic during the waiting time
ewt	waiting time when de-activating a time slot, including time for signaling new assignments to the mobile stations.
$\lambda_{is}$	estimated service-session arrival rate
$\mu_{is}$	estimated service-session departure rate
U	Number of users, $u = 1, 2, \dots, U$
C	Number of cells, $c = 1, 2, \dots, C$
$A_{rsts} C_{rsts}$	Constant in the expression of reserved speech time slots
M	Number of performance measures, $m = 1, 2, \dots, M$
P	Highest (Present) ranking class
$T_m$	Sliding time window when evaluating to end an MPDCH
$T_s$	Sliding time window when evaluating to end an SPDCH

While the invention has been described in connection with what is presently considered to be the most practical and preferred embodiment, it is to be understood that the invention is not to be limited to the disclosed embodiment, but on the contrary, is intended to cover various modifications and equivalent arrangements included within  
5 the spirit and scope of the appended claims.

**WHAT IS CLAIMED IS:**

- 1           1. In a cellular telecommunications system, a method of dynamically allocating  
2 packet data radio channels among users competing in a same cell for the channels, the  
3 method comprising:
  - 4           (1) determining a user ranking for each of plural competing users in the cell  
5 whereby each of the plural competing users is classified into one of plural ranking  
6 classes;
  - 7           (2) determining a number of the packet data radio channels available for each of  
8 the ranking classes;
  - 9           (3) sorting users within each ranking class by ranking; and
  - 10          (4) allocating the packet data radio channels to the users by ranking classes and  
11 in accordance with the sorting of step (3).
- 1           2. The method of claim 1, wherein the user ranking for a user is related to a  
2 combination of plural measures of performance for the user.
- 1           3. The method of claim 2, wherein the plural measures of performance for the  
2 user include user priority and maximum delay relative to a target maximum delay value.
- 1           4. The method of claim 2, wherein the plural measures of performance for the  
2 user include at least two of the following: (1) user priority; (2) maximum delay  
3 relative to a target maximum delay value; (3) remaining time relative to a transmission  
4 time in higher layers; (4) an assigned bit rate relative to a target bit rate value; (5) a  
5 number of remaining packets relative to a target number of remaining packets; (6) a  
6 number of recent transmission failures; (7) a required output power value relative to a  
7 target output power value; (8) a radio link quality value relative to a target radio link  
8 value; and (9) normalized packet delay.
- 1           5. The method of claim 2, wherein the user ranking for a user is related to a  
2 weighted combination of plural measures of performance for the user.
- 1           6. The method of claim 2, wherein the user ranking for a user is determined in  
2 accordance with the combination  $r_u = a_1 f_1(x_{1u}) + a_2 f_2(x_{2u}) + \dots + a_M f_M(x_{Mu})$ , in which

3 there are M different measures of performance for each user; the performance measures  
4 being represented by a vector (x), and which includes ranking weighting-functions,  $f_m$   
5 and ranking weighting-constants,  $a_m$ .

1 7. The method of claim 1, wherein step (4) involves awarding packet data radio  
2 channels in descending ranking order within each ranking class.

1 8. The method of claim 1, wherein step (4) involves determining a limiting  
2 number of packet data radio channels available to a particular ranking class and then, to  
3 the users in the particular ranking class, awarding the limiting number of packet data  
4 radio channels in descending ranking order within the particular ranking class.

1 9. The method of claim 1, wherein steps (1) through (4) are performed by a  
2 processor.

1 10. The method of claim 9, wherein the processor is situated at a base station  
2 controller node of a cellular telecommunications system.

1 11. A node of a cellular telecommunications system which dynamically allocates  
2 packet data radio channels among users competing in a same cell for the channels, the  
3 node including a processor which executes instructions stored in a memory for  
4 performing the steps of:

5 (1) determining a user ranking for each of plural competing users in the cell  
6 whereby each of the plural competing users is classified into one of plural ranking  
7 classes;

8 (2) determining a number of the packet data radio channels available for each of  
9 the ranking classes;

10 (3) sorting users within each ranking class by ranking; and

11 (4) allocating the packet data radio channels to the users by ranking classes and  
12 in accordance with the sorting of step (3).

1 12. The apparatus of claim 11, wherein the user ranking for a user is related to a  
2 combination of plural measures of performance for the user.



1           13. The apparatus of claim 12, wherein the plural measures of performance for  
2 the user include user priority and maximum delay relative to a target maximum delay  
3 value.

1           14. The apparatus of claim 12, wherein the plural measurers of performance for  
2 the user include at least two of the following: (1) user priority; (2) maximum delay  
3 relative to a target maximum delay value; (3) remaining time relative to a transmission  
4 time in higher layers; (4) an assigned bit rate relative to a target bit rate value; (5) a  
5 number of remaining packets relative to a target number of remaining packets; (6) a  
6 number of recent transmission failures; (7) a required output power value relative to a  
7 target output power value; (8) a radio link quality value relative to a target radio link  
8 value; and (9) normalized packet delay.

1           15. The apparatus of claim 12, wherein the user ranking for a user is related to a  
2 weighted combination of plural measures of performance for the user.

1           16. The apparatus of claim 12, wherein the user ranking for a user is determined  
2 in accordance with the combination  $r_u = a_1 f_1(x_{1u}) + a_2 f_2(x_{2u}) + \dots + a_M f_M(x_{Mu})$ , in which  
3 there are M different measures of performance for each user; the performance measures  
4 being represented by a vector (x), and which includes ranking weighting-functions,  $f_m$   
5 and ranking weighting-constants,  $a_m$ .

1           17. The apparatus of claim 11, wherein step (4) involves awarding packet data  
2 radio channels in descending ranking order within each ranking class.

1           18. The apparatus of claim 11, wherein step (4) involves determining a limiting  
2 number of packet data radio channels available to a particular ranking class and then, to  
3 the users in the particular ranking class, awarding the limiting number of packet data  
4 radio channels in descending ranking order within the particular ranking class.

1           19. The apparatus of claim 11, wherein the node is a base station controller node  
2 of the cellular telecommunications system

1           20. In a cellular telecommunications system, a method of dynamically allocating  
2 packet data radio channels among users competing in a same cell for the channels, the  
3 method comprising:

4           (1) determining a user ranking for each of plural competing users in the cell, the  
5 user ranking for a user being related to a weighted combination of plural measures of  
6 performance for the user; and

7           (2) allocating the packet data radio channels to the users in accordance with user  
8 ranking.

1           21. The method of claim 20, wherein the plural measures of performance for the  
2 user include user priority and maximum delay relative to a target maximum delay value.

1           22. The method of claim 20, wherein the plural measures of performance for  
2 the user include at least two of the following: (1) user priority; (2) maximum delay  
3 relative to a target maximum delay value; (3) remaining time relative to a transmission  
4 time in higher layers; (4) an assigned bit rate relative to a target bit rate value; (5) a  
5 number of remaining packets relative to a target number of remaining packets; (6) a  
6 number of recent transmission failures; (7) a required output power value relative to a  
7 target output power value; (8) a radio link quality value relative to a target radio link  
8 value; and (9) normalized packet delay.

1           23. The method of claim 20, wherein steps (1) and (2) are performed by a  
2 processor.

1           24. The method of claim 23, wherein the processor is situated at a base station  
2 controller node of a cellular telecommunications system.

1           25. A node of a cellular telecommunications system which dynamically allocates  
2 packet data radio channels among users competing in a same cell for the channels, the  
3 node including a processor which executes instructions stored in a memory for  
4 performing the steps of:

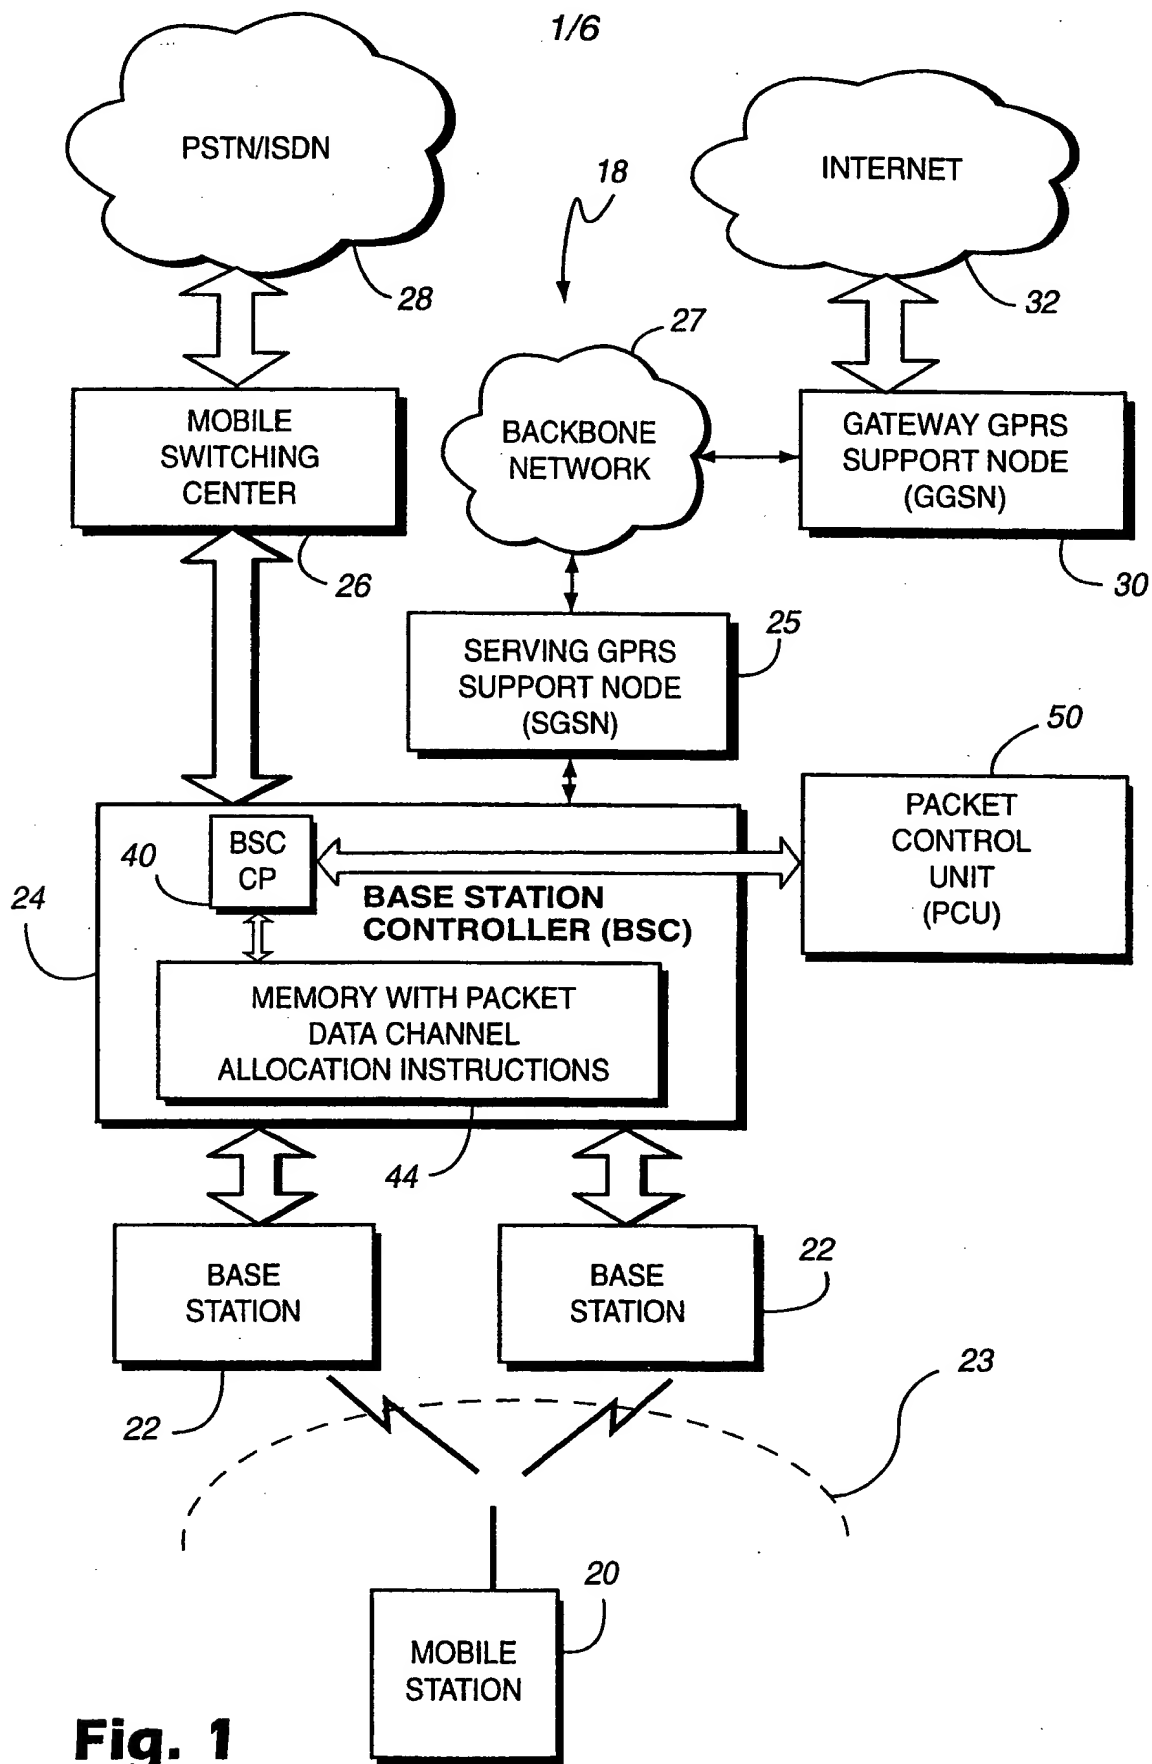
5           (1) determining a user ranking for each of plural competing users in the cell, the  
6 user ranking for a user being related to a weighted combination of plural measures of  
7 performance for the user; and

8 (2) allocating the packet data radio channels to the users in accordance with user  
9 ranking.

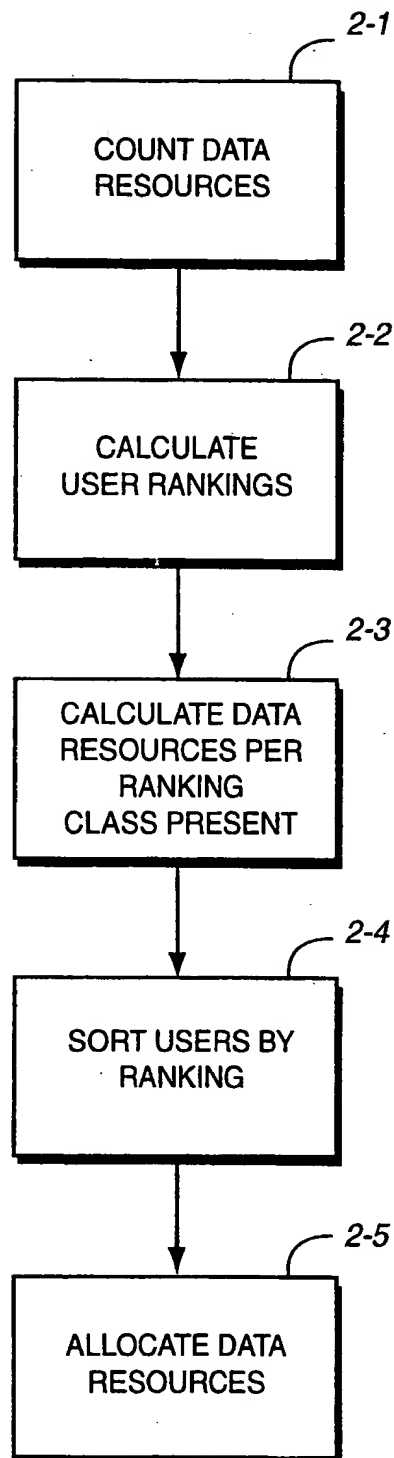
1 26. The apparatus of claim 25, wherein the plural measures of performance for  
2 the user include user priority and maximum delay relative to a target maximum delay  
3 value.

1 27. The apparatus of claim 25, wherein the plural measurers of performance for  
2 the user include at least two of the following: (1) user priority; (2) maximum delay  
3 relative to a target maximum delay value; (3) remaining time relative to a transmission  
4 time in higher layers; (4) an assigned bit rate relative to a target bit rate value; (5) a  
5 number of remaining packets relative to a target number of remaining packets; (6) a  
6 number of recent transmission failures; (7) a required output power value relative to a  
7 target output power value; (8) a radio link quality value relative to a target radio link  
8 value; and (9) normalized packet delay.

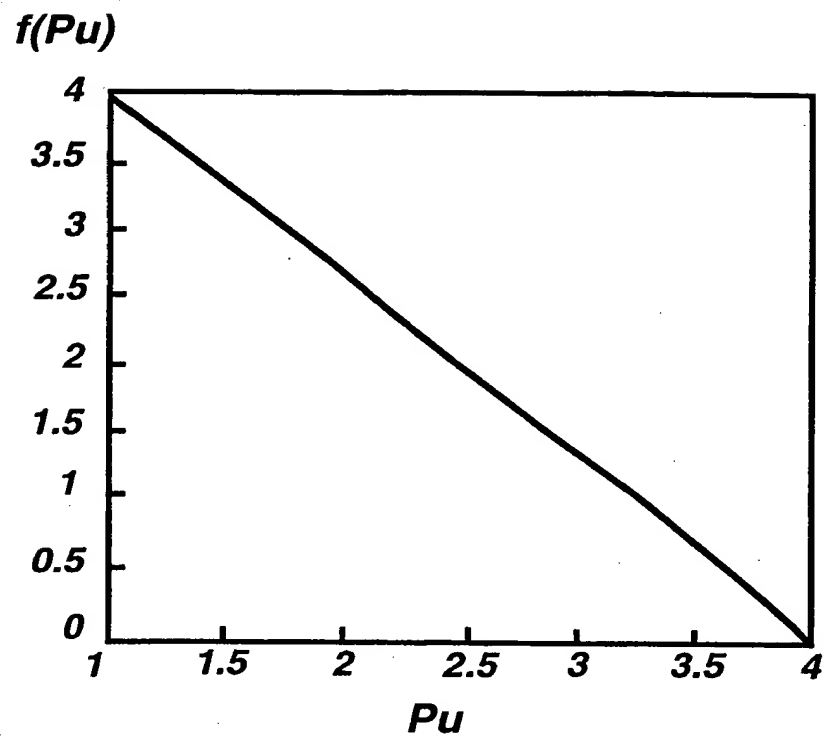
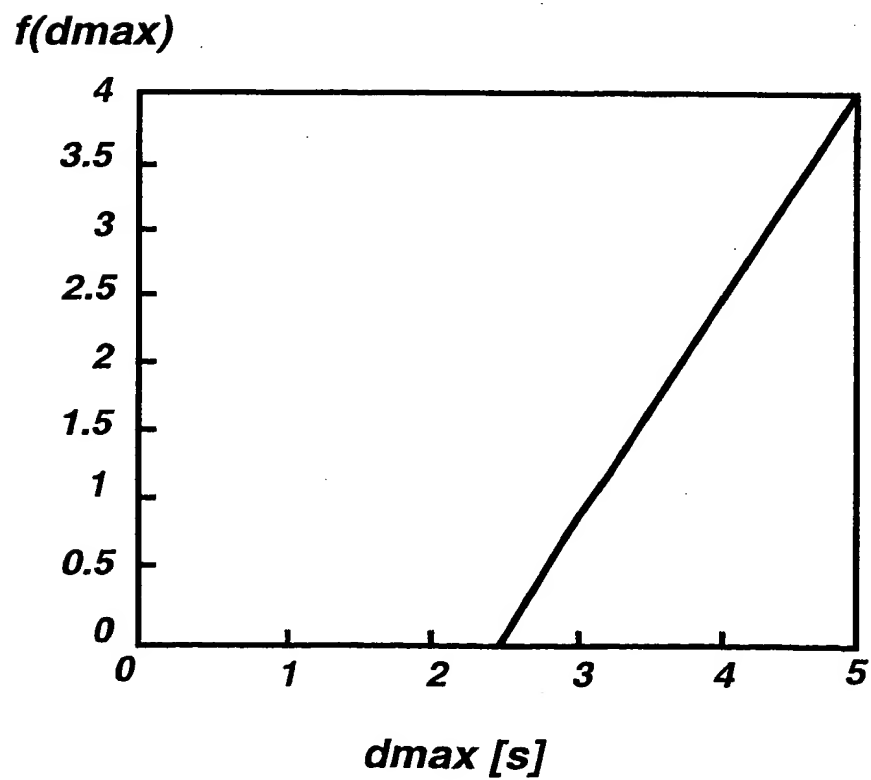
1 28. The apparatus of claim 25, wherein the processor is situated at a base station  
2 controller node of a cellular telecommunications system.



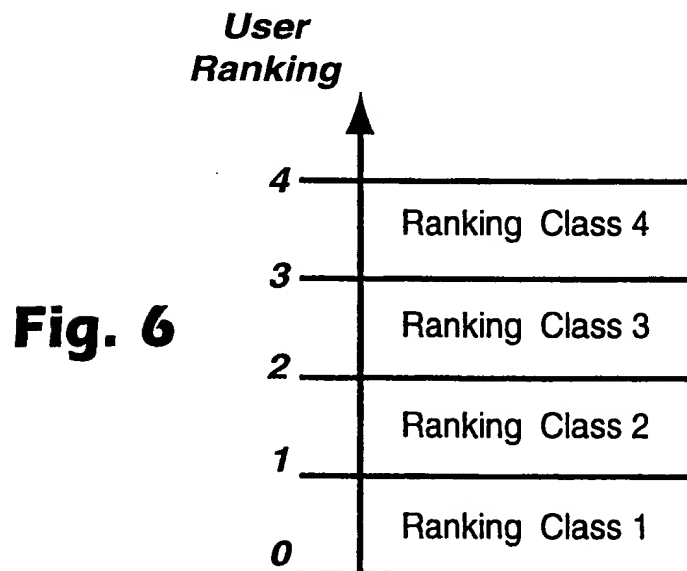
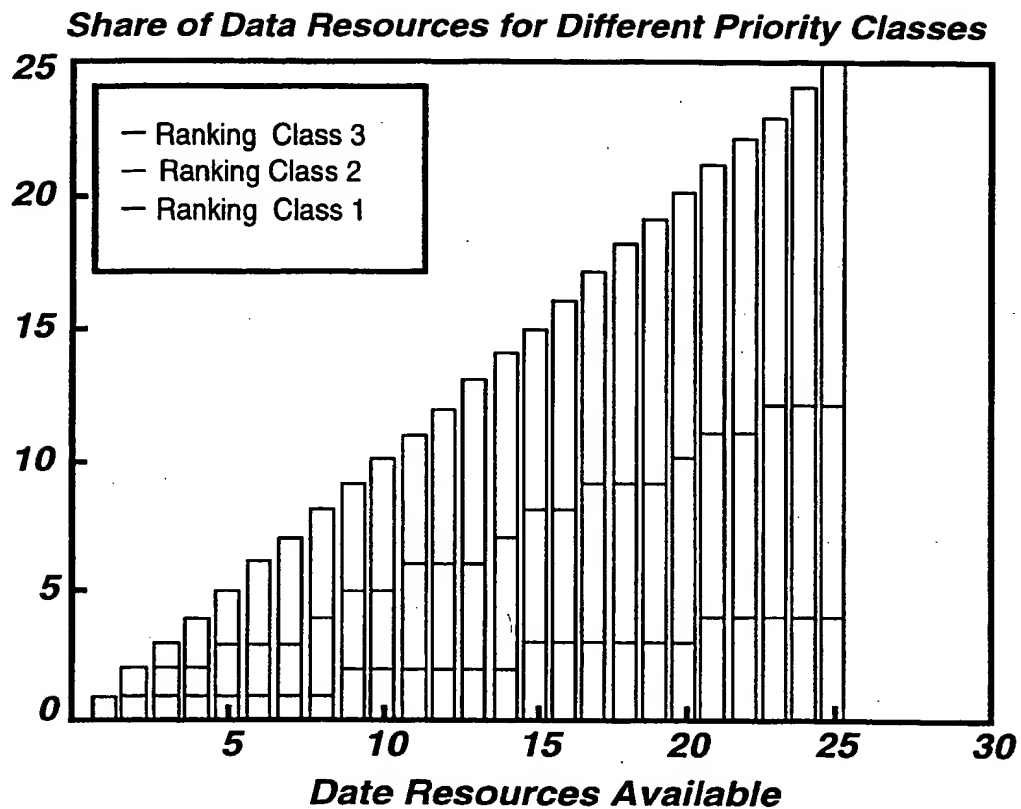
2/6

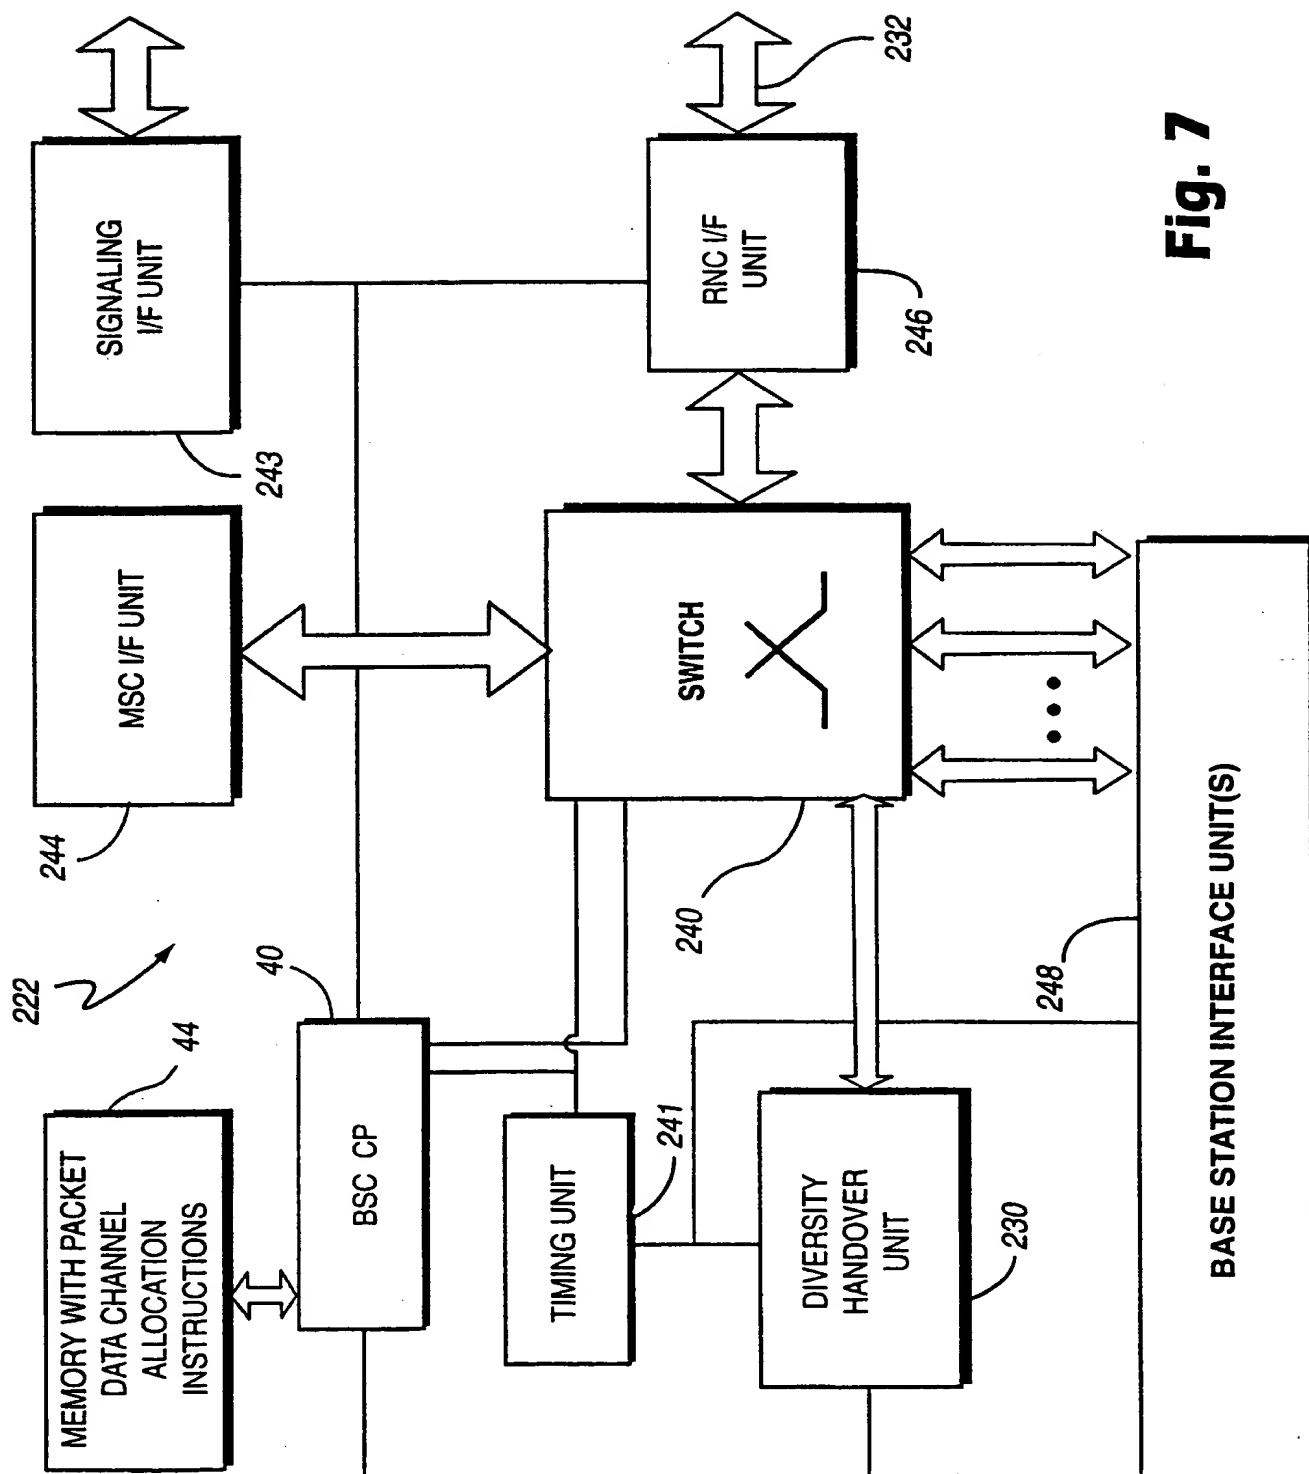
**Fig. 2**

3/6

**Fig. 3****Fig. 4**

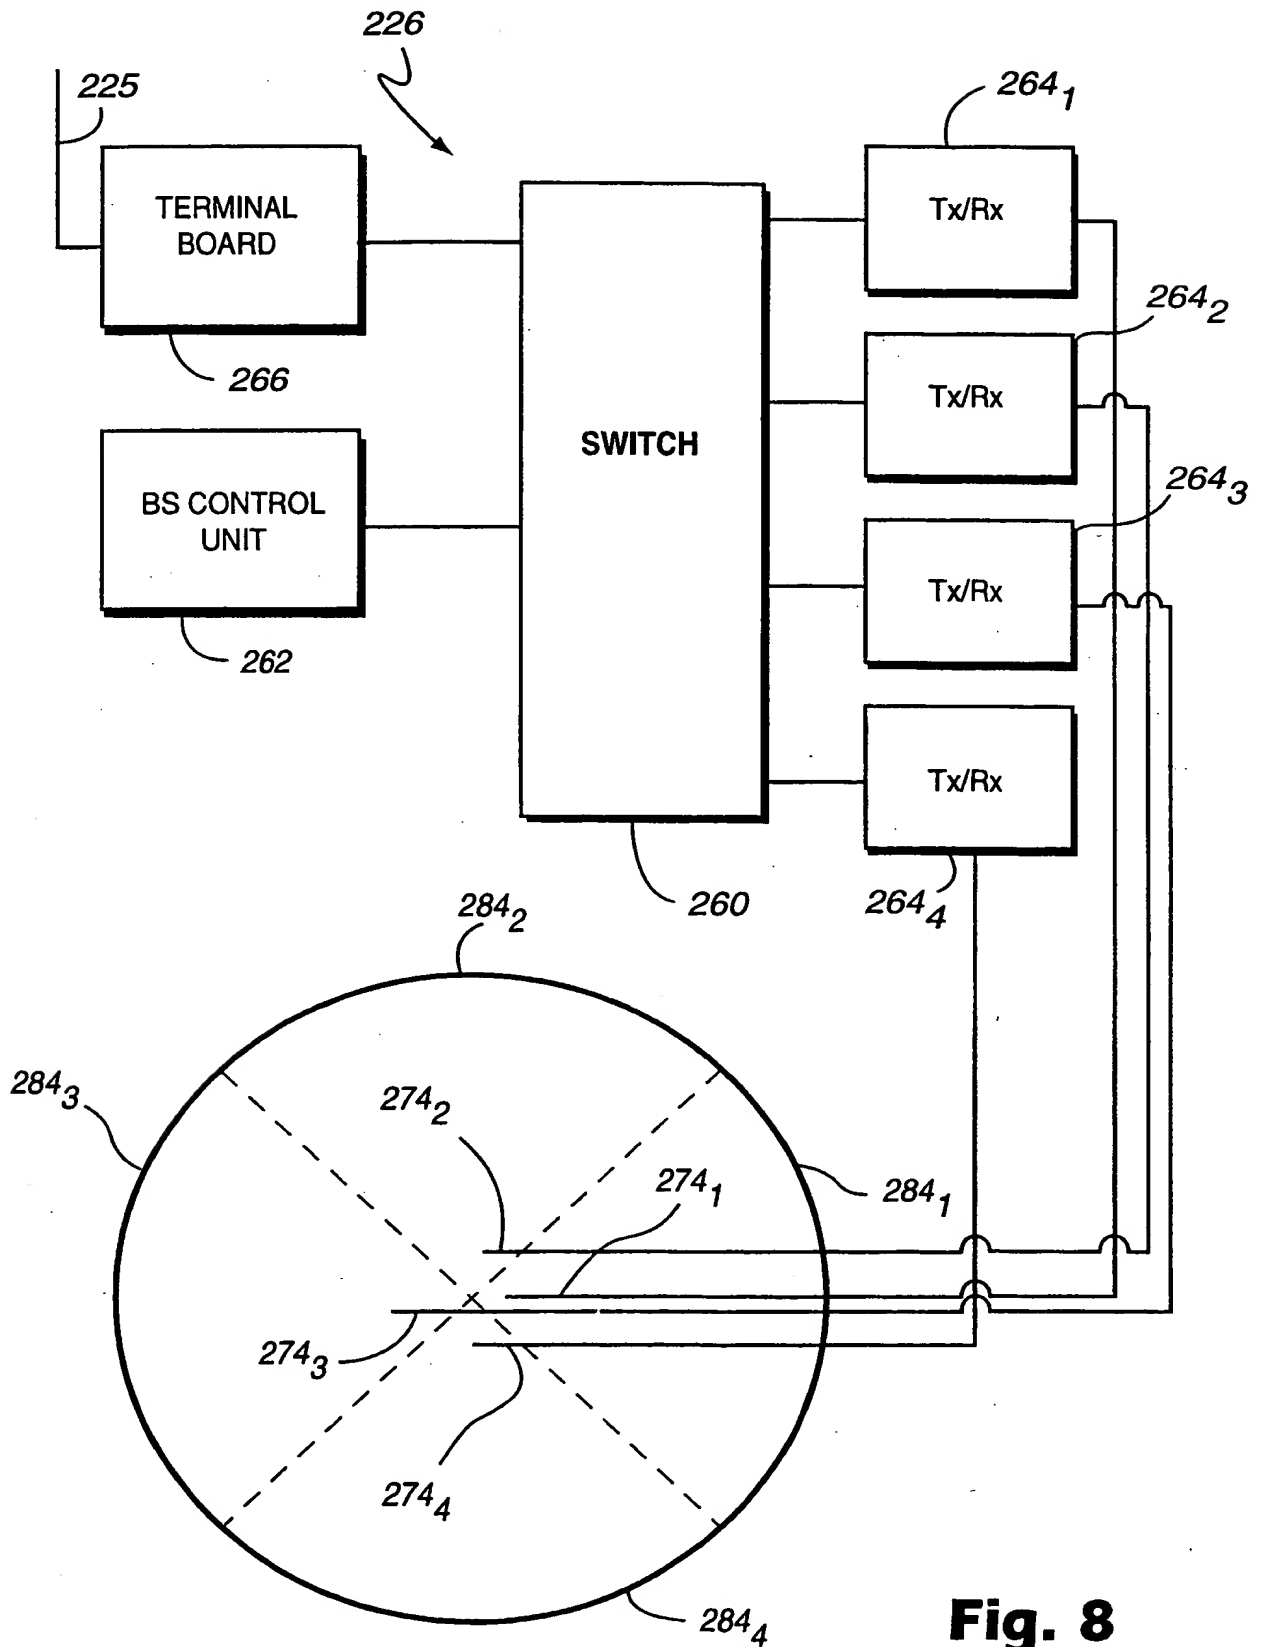
4/6

**Fig. 5**

**Fig. 7**



6/6

**Fig. 8**

## INTERNATIONAL SEARCH REPORT

International Application No

PC./SE 99/00688

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04Q7/22

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 09836 A (MOTOROLA INC) 13 March 1997 (1997-03-13)  page 5, line 1 -page 8, line 5 page 12, line 12 -page 13, line 25; figure 1  ---	1-3, 7-13, 17, 19, 20, 23, 25, 28
A	AZIZ G ET AL: "Dynamic Resource Allocation for GSM-GPRS Services over a LEO Satellite System" PROCEEDINGS OF ICICS. INTERNATIONAL CONFERENCE ON INFORMATION COMMUNICATIONS AND SIGNAL PROCESSING, vol. 1A1.5, 9 September 1997 (1997-09-09), pages 1-5, XP002084744 page 3, left-hand column, line 29 -right-hand column, line 2  ---  -/--	20, 23, 25, 28

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

23 September 1999

Date of mailing of the international search report

01/10/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Tsapelis, A

## INTERNATIONAL SEARCH REPORT

International Application No

PC 1/SE 99/00688

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 97 11570 A (ERICSSON TELEFON AB L M) 27 March 1997 (1997-03-27) page 3, line 31 -page 5, line 3 page 7, line 13 - line 15 page 14, line 23 -page 15, line 6 ----	1, 11
A	WEEN A ET AL: "GSM SIGNALLING IN PRIORITISED LEOS ENVIRONMENT" IEEE GLOBAL TELECOMMUNICATIONS CONFERENCE, PHOENIX, ARIZONA, NOV. 3 - 8, 1997, vol. 2, 3 November 1997 (1997-11-03), pages 1152-1156, XP000737711 INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS ISBN: 0-7803-4199-6 the whole document -----	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PC1/SE 99/00688

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9709836 A	13-03-1997	US 5752193 A CN 1194083 A EP 0847657 A	12-05-1998 23-09-1998 17-06-1998
WO 9711570 A	27-03-1997	US 5666348 A AU 7005196 A CN 1201583 A EP 0852102 A	09-09-1997 09-04-1997 09-12-1998 08-07-1998